

GENERATOR DETAIL**SEPTEMBER 30, 2020**For Help Desk Phone Numbers [Click here](#)**Selected Model**

Engine: 3516	Generator Frame: 825	Genset Rating (kW): 2000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 1604022	Genset Rating (kVA): 2500.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 3007.0
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current

Version: 39094 /41210 /40631 /13617

Spec Information

Generator Specification		Generator Efficiency			
Frame: 825	Type: SR4B	No. of Bearings: 1	Per Unit Load	kW	Efficiency %
Winding Type: RANDOM WOUND	Flywheel: 21.0		0.25	500.0	94.3
Connection: SERIES STAR	Housing: 00		0.5	1000.0	96.2
Phases: 3	No. of Leads: 6		0.75	1500.0	96.5
Poles: 4	Wires per Lead: 8		1.0	2000.0	96.4
Sync Speed: 1800	Generator Pitch: 0.7917				
Reactances		Per Unit	Ohms		
SUBTRANSIENT - DIRECT AXIS X''_d		0.1790	0.0165		
SUBTRANSIENT - QUADRATURE AXIS X''_q		0.1638	0.0151		
TRANSIENT - SATURATED X'_d		0.2886	0.0266		
SYNCHRONOUS - DIRECT AXIS X_d		4.0842	0.3764		
SYNCHRONOUS - QUADRATURE AXIS X_q		1.9314	0.1780		
NEGATIVE SEQUENCE X_2		0.1714	0.0158		
ZERO SEQUENCE X_0		0.0651	0.0060		
Time Constants		Seconds			
OPEN CIRCUIT TRANSIENT - DIRECT AXIS T'_{d0}		6.6330			
SHORT CIRCUIT TRANSIENT - DIRECT AXIS T'_d		0.4683			
OPEN CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_{d0}		0.0076			
SHORT CIRCUIT SUBTRANSIENT - DIRECT AXIS T''_d		0.0064			
OPEN CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T''_{q0}		0.0058			
SHORT CIRCUIT SUBTRANSIENT - QUADRATURE AXIS T''_q		0.0050			
EXCITER TIME CONSTANT T_e		0.2225			
ARMATURE SHORT CIRCUIT T_a		0.0400			

Short Circuit Ratio: 0.29		Stator Resistance = 0.0019 Ohms		Field Resistance = 1.003 Ohms	
Voltage Regulation			Generator Excitation		
Voltage level adjustment: +/-	5.0%	No Load	Full Load, (rated) pf		
Voltage regulation, steady state: +/-	0.5%		Series	Parallel	
Voltage regulation with 3% speed change: +/-	0.5%	Excitation voltage:	6.38 Volts	37.03 Volts	Volts
Waveform deviation line - line, no load: less than	3.0%	Excitation current	1.68 Amps	8.02 Amps	Amps
Telephone influence factor: less than	50				


Selected Model

Engine: 3516	Generator Frame: 825	Genset Rating (kW): 2000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 1604022	Genset Rating (kVA): 2500.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 3007.0
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current

Version: 39094 /41210 /40631 /13617

Generator Mechanical Information

Center of Gravity		
Dimension X	-906.8 mm	-35.7 IN.
Dimension Y	0.0 mm	0.0 IN.
Dimension Z	0.0 mm	0.0 IN.
<ul style="list-style-type: none"> • "X" is measured from driven end of generator and parallel to rotor. Towards engine fan is positive. See General Information for details • "Y" is measured vertically from rotor center line. Up is positive. • "Z" is measured to left and right of rotor center line. To the right is positive. 		
Generator WT = 4330 kg * Rotor WT = 1541 kg * Stator WT = 2789 kg 9,546 LB 3,397 LB 6,149 LB		
Rotor Balance = 0.0508 mm deflection PTP Overspeed Capacity = 150% of synchronous speed		

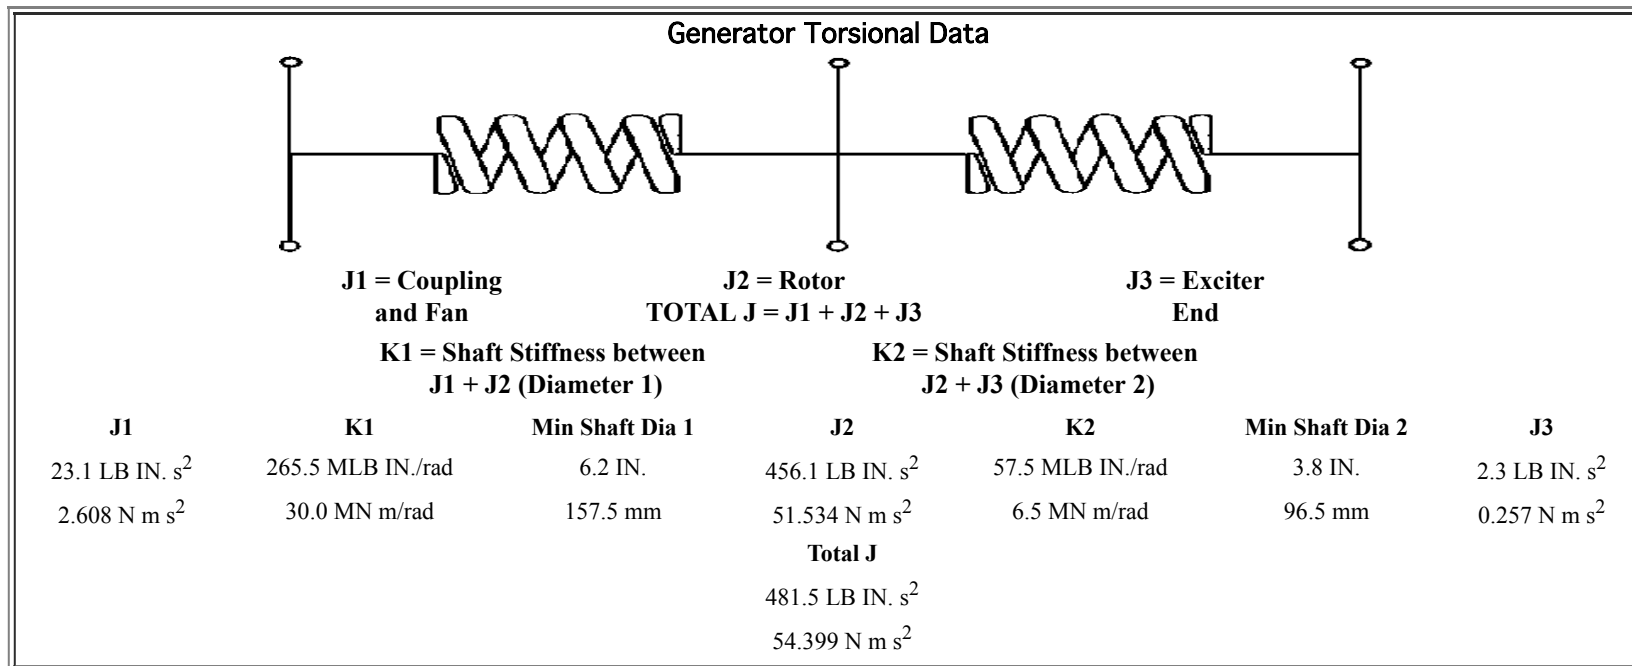

Selected Model

Engine: 3516	Generator Frame: 825	Genset Rating (kW): 2000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 1604022	Genset Rating (kVA): 2500.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 3007.0
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current
<small>Version: 39094 /41210 /40631 /13617</small>			

Generator Cooling Requirements - Temperature - Insulation Data			
Cooling Requirements:		Temperature Data: (Ambient 40 °C)	
Heat Dissipated: 74.7 kW		Stator Rise:	130.0 °C
Air Flow: 168.0 m ³ /min		Rotor Rise:	130.0 °C
Insulation Class: H			
Insulation Reg. as shipped: 100.0 MΩ minimum at 40 °C			
Thermal Limits of Generator			
Frequency:	60 Hz		
Line to Line Voltage:	480 Volts		
B BR 80/40	1893.0 kVA		
F BR -105/40	2281.0 kVA		
H BR - 125/40	2500.0 kVA		
F PR - 130/40	2500.0 kVA		

Selected Model

Engine: 3516	Generator Frame: 825	Genset Rating (kW): 2000.0	Line Voltage: 480
Fuel: Diesel	Generator Arrangement: 1604022	Genset Rating (kVA): 2500.0	Phase Voltage: 277
Frequency: 60	Excitation Type: Permanent Magnet	Pwr. Factor: 0.8	Rated Current: 3007.0
Duty: STANDBY	Connection: SERIES STAR	Application: EPG	Status: Current


Version: 39094 /41210 /40631 /13617

Starting Capability & Current Decrement

Motor Starting Capability (0.4 pf)

SKVA	Percent Volt Dip
231	2.5
475	5.0
732	7.5
1,003	10.0
1,289	12.5
1,592	15.0
1,914	17.5
2,256	20.0
2,620	22.5
3,008	25.0
3,422	27.5
3,867	30.0
4,344	32.5
4,858	35.0
5,414	37.5
6,015	40.0


Motor Starting

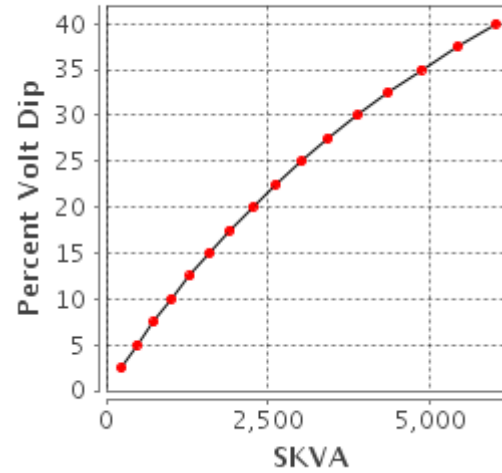

Current Decrement Data

E Time Cycle	AMP
0.0	16,621
1.0	10,558
2.0	9,797
3.0	9,451
4.0	9,145
5.0	8,853
7.5	8,166
10.0	7,538
12.5	6,963
15.0	6,438
20.0	5,516
25.0	4,746
30.0	4,476
35.0	5,167
40.0	5,860
45.0	6,459

Current Decrement

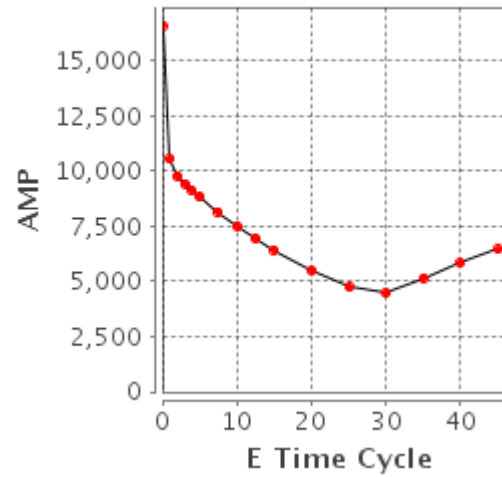

Instantaneous 3 Phase Fault Current: 16621 Amps

Instantaneous Line - Line Fault Current: 14709 Amps

Instantaneous Line - Neutral Fault Current: 21470 Amps

Selected Model

Engine: 3516
Fuel: Diesel
Frequency: 60
Duty: STANDBY

Generator Frame: 825
Generator Arrangement: 1604022
Excitation Type: Permanent Magnet
Connection: SERIES STAR

Genset Rating (kW): 2000.0
Genset Rating (kVA): 2500.0
Pwr. Factor: 0.8
Application: EPG


Line Voltage: 480
Phase Voltage: 277
Rated Current: 3007.0
Status: Current

Version: 39094 /41210 /40631 /13617

**Generator Output Characteristic Curves
 Open Circuit Curve**

Open Circuit


Field Current	Line - Line Volt
0.0	0
9.1	288
10.8	336
12.5	384
14.6	432
17.3	480
21.6	528
29.4	576
44.9	624
77.7	672

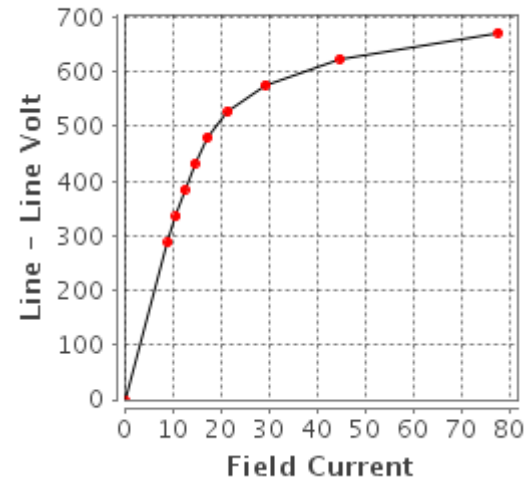

Short Circuit Curve

Short Circuit

Field Current	Armature Current
0.0	0
35.4	1,804
41.3	2,105
47.2	2,406
53.1	2,706
59.0	3,007
64.9	3,308
70.8	3,608
76.7	3,909
82.6	4,210

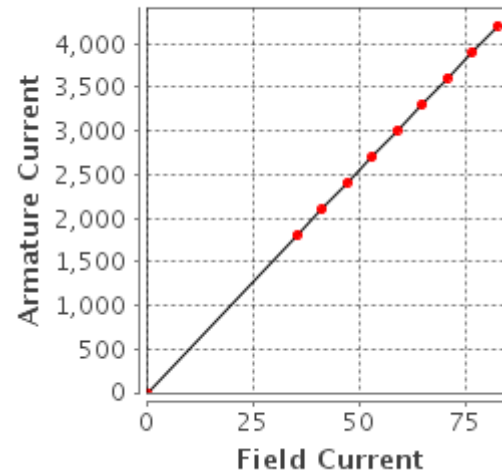

Selected Model

Engine: 3516

Generator Frame: 825

Genset Rating (kW): 2000.0

Line Voltage: 480

Fuel: Diesel

Generator Arrangement: 1604022

Genset Rating (kVA): 2500.0

Phase Voltage: 277

Frequency: 60

Excitation Type: Permanent Magnet

Pwr. Factor: 0.8

Rated Current: 3007.0

Duty: STANDBY

Connection: SERIES STAR

Application: EPG

Status: Current


Version: 39094 /41210 /40631 /13617

Generator Output Characteristic Curves

Zero Power Factor Curve

Zero Power


Field Current	Line - Line Volt
59.0	0
71.3	240
73.6	288
76.7	336
81.7	384
91.0	432
109.9	480
150.5	528
239.5	576
436.8	624

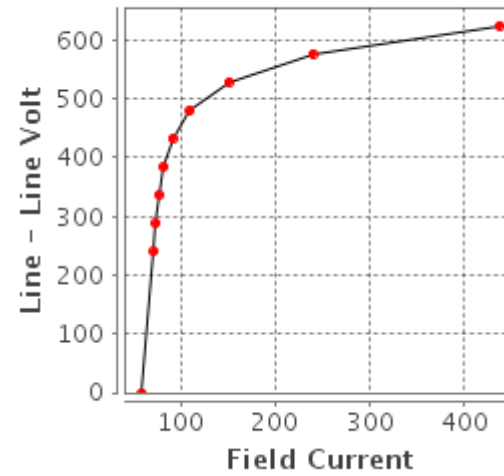

Air Gap Curve

Air Gap

Field Current	Line - Line Volt
0.0	0
9.0	288
10.6	336
12.1	384
13.6	432
15.1	480
16.6	528
18.1	576
19.6	624
21.1	672

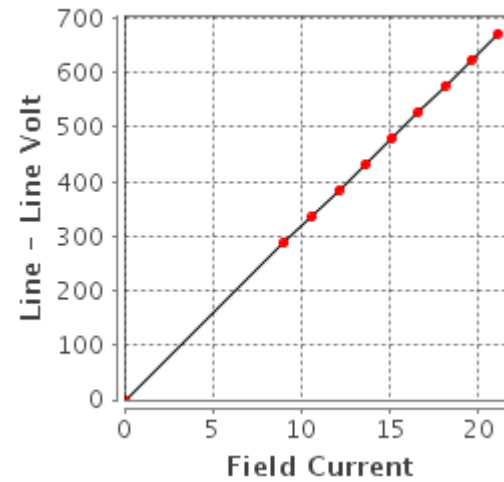

Selected Model

Engine: 3516
Fuel: Diesel
Frequency: 60
Duty: STANDBY


Generator Frame: 825
Generator Arrangement: 1604022
Excitation Type: Permanent Magnet
Connection: SERIES STAR

Genset Rating (kW): 2000.0
Genset Rating (kVA): 2500.0
Pwr. Factor: 0.8
Application: EPG

Line Voltage: 480
Phase Voltage: 277
Rated Current: 3007.0
Status: Current

Version: 39094 /41210 /40631 /13617

Reactive Capability Curve Operating Chart

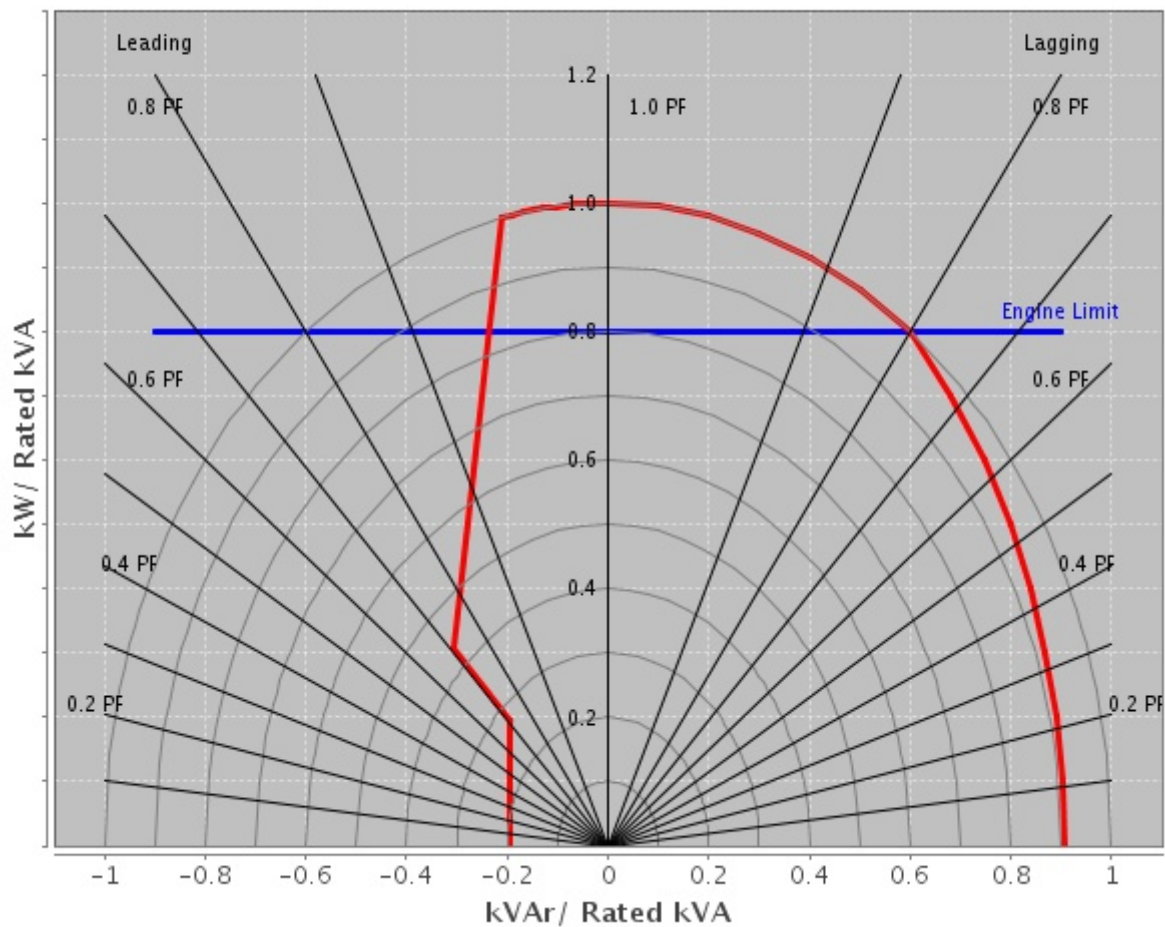

Selected Model**Engine:** 3516**Fuel:** Diesel**Frequency:** 60**Duty:** STANDBY**Generator Frame:** 825**Generator Arrangement:** 1604022**Excitation Type:** Permanent Magnet**Connection:** SERIES STAR**Genset Rating (kW):** 2000.0**Genset Rating (kVA):** 2500.0**Pwr. Factor:** 0.8**Application:** EPG**Line Voltage:** 480**Phase Voltage:** 277**Rated Current:** 3007.0**Status:** Current

Version: 39094 /41210 /40631 /13617

General Information

DM7802

GENERATOR GENERAL INFORMATION

I. GENERATOR MOTOR STARTING CAPABILITY CURVES

A. THE MOTOR STARTING CURVES ARE REPRESENTATIVE OF THE DATA OBTAINED BY THE FOLLOWING PROCEDURE:

1. THE CATERPILLAR GENERATOR IS DRIVEN BY A SYNCHRONOUS DRIVER.
2. VARIOUS SIZE THREE PHASE INDUCTION MOTORS (NEMA CODE F) ARE STARTED ACROSS THE LINE LEADS OF THE UNLOADED GENERATOR.
3. THE RESULTING VOLTAGE DIPS ARE RECORDED WITH AN OSCILLOSCOPE.
4. MOTOR HORSEPOWER HAS BEEN CONVERTED TO STARTING KILOVOLT AMPERES (SKVA).
5. RECORDED VOLTAGE DIPS HAVE BEEN EXPRESSED AS A OF GENERATOR RATED VOLTAGE.

II. USE OF THE MOTOR STARTING CAPABILITY CURVES.

A. CALCULATE THE SKVA REQUIRED BY THE MOTOR FOR FULL VOLTAGE STARTING ACROSS THE LINE IF THE VALUE IS NOT LISTED ON THE MOTOR DATA PLATE.

1. MOTORS CONFORMING TO NEMA STANDARDS
MULTIPLY THE MOTOR HORSEPOWER BY THE NEMA SKVA/HP FIGURE. FOR NEMA CODE F, USE 5.3 SKVA/HP; FOR NEMA CODE G, USE 6.0 SKVA/HP.

2. ALL OTHER MOTORS:

MULTIPLY THE RATED VOLTAGE BY THE LOCKED ROTOR AMPERE AND BY 0.001732. (IF THE LOCKED ROTOR AMPERES ARE NOT LISTED, MULTIPLY THE FULL LOAD (RUNNING) AMPERES BY B. USE THE ABOVE SKVA WITH THE MOTOR STARTING TABLE.

1. ACROSS LINE STARTING:

READ ACROSS THE ROW OF "ACROSS THE LINE STARTING SKVA IF THE DESIRED VALUE OF SKVA IS NOT GIVEN, CALCULATE THE DIP BY FINDING THE PROPER SKVA INTERVAL AND INTERPOLATING AS FOLLOWS:

SKVA1 IS THE SKVA TABLE ENTRY JUST SMALLER THAN THE DESIRED SKVA, DIP1 IS THE DIP FOR SKVA2, AND SKVA2 IS THE SKVA TABLE ENTRY JUST GREATER THAN THE DESIRED SKVA. THE DIP (IN PERCENT) AT THE DESIRED SKVA IS:

$$\text{DIP} = \text{DIP1} + (\text{SKVA} - \text{SKVA1}) * 2.5 / (\text{SKVA2} - \text{SKVA1})$$

NOTE: VOLTAGE DIPS GREATER THAN 35% MAY CAUSE MAGNETIC CONTACTORS TO DROP OUT.

2. REDUCED VOLTAGE STARTING:

REFER TO THE FOLLOWING TABLE. MULTIPLY THE CALCULATE ACROSS LINE SKVA BY THE MULTIPLIER LISTED FOR THE SPECIFIC STARTING METHOD. APPLY THE RESULT TO

THE STARTING TABLE AS IN II A, TO CALCULATE THE EXPECTED VOLTAGE DIP:

TYPE OF REDUCED VOLTAGE STARTING	MULTIPLY LINE SKVA BY
80% TAP	.80
65% TAP	.65
50% TAP	.50
45% TAP	.45
Wye start,delta run	.33

AUTOTRANSFORMER

80% TAP	.68
65% TAP	.46
50% TAP	.29

NOTE: REDUCE VOLTAGE STARTING LOWERS THE MAXIMUM REQUIRED MOTOR skVA.

3. Part winding starting:

Most common is half-winding start, full-winding run.

Multiply the full motor, across line starting skVA by 0.6. Apply the result to the selected curve as in ii. A above. Read the expected voltage dip, for the required skVA.

III.DEFINITION:

A. GENERATOR TERMS

MODEL: Engine Sales model

ENG TYPE: DI = Direct Injection,

NA = Naturally aspirated, etc

HZ: Running frequency, hertz

RATING TYPE: PP, SB (prime power or standby)

KW: Base rating electrical kilowatts (ekW)

VOLTS: Rating terminal, line to line

GEN ARR: Cat generator arrangement part number

GEN FRAME: Generator frame size designation

CONN: Generator output connection

(star, wye, delta, ect.)

POLES: Number of pole pieces on rotor.

(eg. A 4 pole generator run at 1800)

RPM will produce 60 Hz alternating current. A 6 pole generator run at 1200 RPM will produce 60 Hz alternating current.)

B. GENERATOR TEMPERATURE RISE:

The indicated temperature rise indicated the NEMA limits for standby or prime power applications. These rises are used for calculating the losses and efficiencies and are not necessarily indicative of the actual temperature rise of a given machine.

C. CENTER OF GRAVITY

The specified center of gravity is for the generator only.

For single bearing, and two bearing close coupled generators, the cent

er of gravity is measured from the generator/engine flywheel housing interface and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

For two bearing, standalone generators, the center of gravity is measured from the end of the rotor shaft and from the centerline of the rotor shaft.

D. GENERATOR DECREMENT CURRENT CURVES

The generator decrement current curve gives the symmetrical current supplied by the generator for a three phase bolted fault at the generator terminals. Generators equipped with the series boost attachment or generators with PM excitation system will supply 300% of rated current for at least 10 seconds.

E. GENERATOR EFFICIENCY CURVES

The efficiency curve is representative of the overall generator efficiency over the normal range of the electrical load and at the specified parameters. This is not the overall engine generator set efficiency curve.

Caterpillar Confidential: **Green**

Content Owner: Commercial Processes Division

Web Master(s): [PSG Web Based Systems Support](#)

Current Date: 9/30/2020, 3:12:26 PM

© Caterpillar Inc. 2020 All Rights Reserved.

[Data Privacy Statement](#).