

Super Quiet Generators
**SUPER QUIET GENERATORS
T270**

STANDARD FEATURES

- Versatile solution for your worksite power needs
- Rental ready mobile generator package
- Heavy duty 4 cycle diesel engine
- User friendly control panel

Specifications

System Power Output	
Model	T270
Prime 3 phase power	214 kW
Prime 3 phase kVA	267 kVA
Available 3 phase voltage	208 / 220 / 240 / 440 / 480
Associated 3 phase amps (0.8 power factor)	741 / 701 / 642 / 350 / 321
Prime 1 phase power	130 kW
Prime 1 phase kVA	130 kVA
Available 1 phase voltage	120 / 240
Associated 1 phase amps (1.0 power factor)	1084 / 542
Max amp rating (main breaker size)	900 A

Super Quiet Generator T270

Specifications


Engine	T270
Manufacturer	Cummins
Model	QSL9-G2
Horsepower - prime (1,800 rpm)	320 hp (239 kWm)
Description	6 cylinder, 4-cycle, water cooled, OHV, in-line, direct injection
Bore & stroke	4.49 x 5.69 in (114 x 145 mm)
Piston displacement	537 in ³ (8.8 L)
Compression ratio	16.8 : 1
Exhaust system	critical grade silencer
Monitoring gauges	oil pressure, water temperature, fuel level, battery voltage, hours
Coolant capacity - engine only	11.6 qts (11 L)
Cooling system	liquid cooled - air to air CAC - rated to 105° F ambient

Fuel System										
Specification	#2 diesel									
Filter	fuel / water separator									
Capacity	300 gal (1,136 L)									
Tank and containment	internal fuel tank with 110% fluid spill containment									
Consumption (run time)	<table border="0"> <tr> <td>Full load</td> <td>14 gal/hr (53 L/hr)</td> <td>16.5 hr</td> </tr> <tr> <td>3/4 load</td> <td>11.3 gal/hr (42.8 L/hr)</td> <td>22.7 hr</td> </tr> <tr> <td>Half load</td> <td>8 gal/hr (30.3 L/hr)</td> <td>33.5 hr</td> </tr> </table>	Full load	14 gal/hr (53 L/hr)	16.5 hr	3/4 load	11.3 gal/hr (42.8 L/hr)	22.7 hr	Half load	8 gal/hr (30.3 L/hr)	33.5 hr
Full load	14 gal/hr (53 L/hr)	16.5 hr								
3/4 load	11.3 gal/hr (42.8 L/hr)	22.7 hr								
Half load	8 gal/hr (30.3 L/hr)	33.5 hr								

System Controls and Distribution	
Engine governor	ECM controlled (+/- .25%)
Protection (safety shutdowns)	low oil pressure, high water temp., overcrank, overspeed, underspeed
Generator gauges	voltmeter, ammeter, Hz meter
Receptacles, 120 V	2 Each 20 Amp GFCI Duplex
Receptacles, 240 V	2 Each 50 Amp Tempower T/L
Primary Distribution	5 lug terminals with mainline circuit breaker

Generator	
Rating (0.8 power factor)	250 kW 3 Phase @ 480 / 240 V
Description	brushless, 4 pole, synchronous, single bearing
Insulation	Class H
Temperature rating	125° C rise over 40° C ambient
Automatic voltage regulator	external, solid state, adjustable
Voltage regulation	+/- 1%
Frequency (speed)	60 Hertz (1,800 rpm)

Packaging					
Enclosure	sound attenuated, weatherproof with lockable doors				
Sound levels	68 dBA at 23 ft (7 meters)				
Lifting system	roof mounted, single point				
Weight (no trailer)	<table border="0"> <tr> <td>empty</td> <td>8,580 lbs (3,892 kg)</td> </tr> <tr> <td>full</td> <td>10,680 lbs (4,844 kg)</td> </tr> </table>	empty	8,580 lbs (3,892 kg)	full	10,680 lbs (4,844 kg)
empty	8,580 lbs (3,892 kg)				
full	10,680 lbs (4,844 kg)				
Dimensions - L x W x H (no trailer)	144 x 50 x 87 in (366 x 127 x 221 cm)				
Weight (with trailer)	<table border="0"> <tr> <td>empty</td> <td>10,460 lbs (4,745 kg)</td> </tr> <tr> <td>full</td> <td>12,560 lbs (5,697 kg)</td> </tr> </table>	empty	10,460 lbs (4,745 kg)	full	12,560 lbs (5,697 kg)
empty	10,460 lbs (4,745 kg)				
full	12,560 lbs (5,697 kg)				
Dimensions - L x W x H (with trailer)	206 x 84 x 106 in (523 x 213 x 269 cm)				

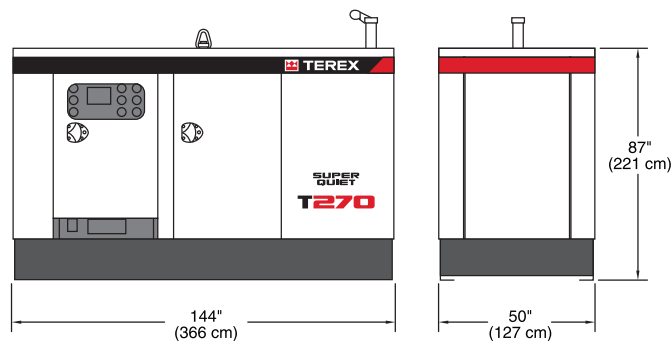

Genie Industries, Inc.

A Terex company

18340 NE 76th Street
PO Box 97030

Redmond, WA 98073-9730

TEL 425-881-1800

TOLL FREE 800-536-1800

PARTS & TECH SUPPORT 800-228-6444

FAX 425-883-8475

WEB www.genieindustries.com

For more information, product demonstration, or details on purchase, lease and rental plans, please contact your local Genie Distributor.