


3412E ATEX

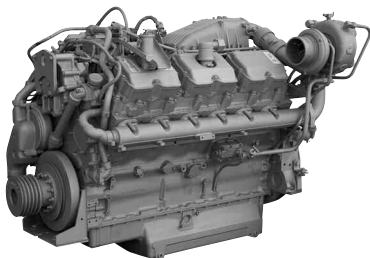

3126B Ratings In-Line 6

	2500 rpm	
	bkW	bhp
T (SCAC)	172	230
	205	275

C10 Ratings In-Line 6

	2100 rpm	
	bkW	bhp
ATAAC	242	325
T (ATAAC)	272	365

3412E Ratings V-12

	2100 rpm	
	bkW	bhp
TA (JWAC)	641	860
	746	1000

Features/Benefits

- Compliant as a component with the EU ATEX directive 94/9/EC for Group II, Category 3G
- Gas Group IIB; temperature Class T3
- Corrosion protection packaged with epoxy mastic primer finish
- Keeps surface temperature below 200°C

Abbreviations used:

JWACJacket Water Aftercooled

ATAACAir-to-Air Aftercooled

TTurbocharged

TATurbocharged/Aftercooled

SCACSeparate Circuit Aftercooled