

Cummins QSK 60 G12	CGT Stamford PI 734	Generator Model: BCC 1825P-60 T2
		Generator Model: BCC 2000S-60 T2

60 Hz	3-Phase	Power Factor Cos Φ = 0.8	Emissions Certification EPA/CARB Tier 2
-------	---------	----------------------------------	--

RATINGS	PRIME POWER (PRP)		STANDBY POWER (LTP)		
	BCC 1825P-60 T2		BCC 2000S-60 T2		
Voltage	kVA	kWe	kVA	kWe	Amps
480/277	2281	1825	2500	2000	3007
440/254	2281	1825	2500	2000	3280
416/240	2281	1825	2500	2000	3470
240/138	2281	1825	2500	2000	6014
220/127	2281	1825	2500	2000	6561

Definition of Ratings & Reference Conditions

Prime Power (PRP) is the nominal output continuously available, where the average load (variable) does not exceed 70% of the prime power rating during an operating period of 250 hours. The total operating time at 100% prime power must not exceed 500 hours per year. A 10% overload is available for a maximum of 1 hour in 12 hours of operation and must not exceed a total of 25 hours per year.

Standby Power (LTP) is the maximum output available (at variable load), for up to 200 hours per year. The average load (variable) must not exceed 80% of the standby power rating, with less than 25 hours per year at the full standby rating. No overload is available. The genset must not operate, at standby rating, in parallel with the public utility under any circumstances.

Standard Reference Conditions: air temperature 25°C (77°F), barometric pressure 100kPa [110m (361ft) altitude], 30% relative humidity.


Note: The above ratings may be subject to derate at different operating conditions. Please see the Derate Guidelines on the Broadcrown website.

All power ratings and reference conditions in accordance with ISO 8528-1 and ISO 3046-1.



Key Features:

- Efficient water cooled diesel engine.
- Single bearing CGT Stamford alternator
- Radiator with pressure cap and drain point
- Fully guarded engine-driven fan
- Fully welded steel baseframe with lifting / jacking points
- Various fuel system options
- Heavy duty rubber anti-vibration mountings
- 24V starter batteries and connecting cables
- Separate engine-driven battery charging alternator
- Spin on oil and fuel filters and dry type air filter element
- ~~Industrial silencer(s) supplied loose~~
- Auto Start control system with digital instrumentation
- Main line circuit breaker
- Factory Test Certificate
- Operation & Maintenance Manual
- Wide range of optional extra features available

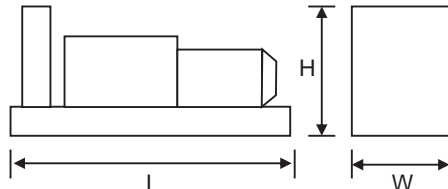

Overall Dimensions & Weights - Open Set

Length (L) = 6200mm [245in]
Width (W) = 2540mm [100in]
Height (H) = 3240mm [130in]

Dry Weight (inc oil) = 14685kg [32360lb]
Operating Weight = 15000kg [33070lb]

Typical Open Generator Sound Pressure Level at 1m, Free Field (dB)								
Overall dBA	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
119	102	107	110	11	112	111	111	115

All specifications and design are subject to change without notice

ENGINE & COOLING SYSTEM CUMMINS QSK60 G12

	SI Units	[US Units]	PRIME	STANDBY
Performance	Engine Speed	r/min	[rpm]	1800
	Gross Power	kWm	[bhp]	1975 [2648] 2180 [2923]
	Fan Power	kWm	[bhp]	25 [33.5] 58 [77.8]
	Net Power	kWm	[bhp]	1950 [2615] 2122 [2846]
	Emissions Certification			EPA Tier 2
	Altitude Capability	m	[ft.]	900 [4000] 900 [4000]
General	Cylinders / Type			16 cyl / 60° Vee / 4-stroke
	Aspiration / Charge Cooling			Turbocharged / 2 Pump 2 Loop
	Governing / Engine Management			TBA
	Bore / Stroke	mm	[in.]	159/190 [4.19 / 4.33]
	Cubic Capacity	litres	[cu.in.]	60.2 [179]
	BMEP	kPa	[psi]	2181 [316] 2408 [349]
Fuel	Fuel Consumption at 100% Power	litres/h	[gal/h]	496 [131] 548 [145]
	Fuel Consumption at 75% Power	litres/h	[gal/h]	385 [102] 424 [112]
	Fuel Consumption at 50% Power	litres/h	[gal/h]	277 [73] 321 [85]
	Total fuel flow	litres/h	[gal/h]	1052 [278]
	Standard Fuel Tank Capacity	litres	[gal]	TBA [TBA]
Air	Engine Air Flow	m³/s	[cfm]	3.06 [6486] 3.22 [6827]
	Maximum Air Intake Restriction (used filter)	kPa	[inWG]	6.23 [25]
Exhaust	Exhaust Gas Flow	m³/s	[cfm]	6.86 [14533] 7.4 [15644]
	Exhaust Gas Temperature	°C	[°F]	419 [786] 440 [824]
	Maximum Exhaust Back Pressure	kPa	[inWG]	6.8 [27]
	Typical Exhaust Pipe Diameter	mm	[in.]	450 [18]
Cooling	Radiator Cooling Air Flow	m³/s	[cfm]	TBA [TBA]
	Max Restriction to Cooling Air Flow	Pa	[inWG]	TBA [TBA]
	Max Radiator Air-On Temperature	°C	[°F]	25 [77]
	Maximum Coolant Temperature	°C	[°F]	104 [219]
	Coolant Capacity - Engine Only	litres	[gal]	159 [42]
	Total Coolant Capacity	litres	[gal]	TBA [TBA]
Oil	Total Oil Capacity incl Filters	litres	[gal]	280 [74]
	Typical Oil Pressure at Rated Speed	kPa	[psi]	483 [70]
	Typical Oil Consumption (>250hrs Operation)	litres/h	[pt/h]	1.31 [2.76]
Thermal	Heat Rejection to Engine Cooling Water	kW	[btu/min]	821 [46731] 872 [49634]
	Heat Rejection to Charge Cooler	kW	[btu/min]	TBA [TBA] TBA [TBA]
	Heat Radiated From Engine (Typical)	kW	[btu/min]	200 [11384] 221 [12579]
Elec	Electrical System Voltage	V		24
	Battery Type			4 (Series-Parallel) 624
	Battery Capacity SAE CCA	A		2020

ALTERNATOR CGT STAMFORD PI 734

	SI Units	[US Units]	PRIME	STANDBY
General Data	Manufacturer			Cummins Generator Technologies - STAMFORD
	Model (may vary with voltage)			PI 734 F PI 734 F
	Operating Temperature	°C	[°F]	40 [104] 27 [81]
	Coupling / No. of Bearings			Direct / Single Bearing
	Phase / Poles / Winding Type			3-Phase / 4-Pole / Winding 311
	Power Factor			Cos Φ = 0.8
	Excitation			Self Excited
	Insulation System			Class H
	AVR Type			MX 321
	Voltage Regulation			±0.5%

All specifications and design are subject to change without notice

STANDARD CONTROL SYSTEM

BC 7210 Digital Auto Start

The standard control system for Export products is **BC 7210** (photo), based on the Deep Sea Electronics DSE7210 Digital Auto Start controller.

This provides for the manual and automatic remote start of the generator with a LCD digital display of :

- Coolant Temperature, with integral high temperature protection
- Oil Pressure, with integral low pressure protection
- Volts, Amps and Frequency
- Engine operating hours
- Battery volts

Also featuring :

- Automatic cool-down timer function
- Emergency Stop button
- Ample auxiliary inputs/outputs for optional features
- Optional - battery charger and door mounted illuminated switch.



CONTROL SYSTEM OPTIONS

BC 7310 & BC 7320 control systems (just the DSE modules shown here) provide complete power monitoring and protection facilities. Compared to BC 7210, addition features include :

- Pre-alarms for Low Oil Pressure and High Coolant Temperature
- Digital display of kW, kVA and Power Factor
- Under/Over Volts protection
- Over Current Protection
- Full RS485 Telemetry and full SAE J1939 CANBus implementation. In fact, all generating sets driven by engines with onboard ECU/CANBus come with this system as standard.

The BC 7320 provides full AMF functionality with integrated mains monitoring and generator/mains contactor control.



Finally, **BC 7510 & BC 7520** control systems provide the same features as BC 7310 & BC 7320 respectively, plus :

- BC 7510 - Set-to-Set Synchronisation
- BC 7520 - Single Set-to-Mains Synchronisation with integrated mains monitoring

For Multi Set-to-Mains synchronisation, each set requires BC 7510 with the addition of one mains monitoring panel **BC 7560** (not illustrated). See the Synchronisation Guidelines for further details.

All designs and specifications subject to change without notice

Options and Features included:

1. Batteries, rack cables
2. Oil and antifreeze, Racor filters
3. Sound attenuated enclosure (85dBA at 1 meter, 75dBA at 3 meters), oil and coolant drains
4. Jacket heater and battery charger
5. Distribution panel for lights, jacket heater, battery charger
6. External E-Stop, curb side external access for cabling and shore power, external access for fuel fill
7. 1057 gallon tank (7.1 hours at 100% load, 8.2 hours at 90% load)
8. Deep Sea digital control panel
9. ABB main breaker 3200 amp
10. Silencers installed inside enclosure
11. Owners and Operators Manuals