



DIESEL FUEL
NO SMOKING
NO OPEN FLAME

DANGER
DIESEL
NO SMOKING





LOW VOLTAGE HIGH VOLTAGE

MAIN TANK
SWITCH OUT

AUXILIARY TANK
SWITCH IN

ENERCON
ENGINEERING

MANUAL
OPERATION AND MAINTENANCE
INSTRUCTIONS
FOR THE
OPERATION AND MAINTENANCE
OF THE
SYSTEM
1. GENERAL INFORMATION
2. SAFETY PRECAUTIONS
3. OPERATION
4. MAINTENANCE
5. TROUBLESHOOTING
6. APPENDICES

DANGER
DO NOT
OPERATE

DANGER
DIESEL
FUEL



WARNING DANGER
MORE THAN ONE LIVE CIRCUIT
AVERTISSEMENT - PLUS D'UN CIRCUIT
SOUS TENSION VOIR SCHEMA

WARNING

V Hz A

OVER CRANK LOW OIL PRESSURE
OVER SPEED EMERGENCY STOP
HIGH COOLANT TEMP P+ SERVICE POWER

CATERPILLAR

Two rotary knobs and a selector switch.

PANEL LIGHTS LAMP TEST ~V Hz STARTING AID

EMERGENCY STOP OFF/RESET COOLDOWN STOP MAN. START AUTO

V-A 0 1 2 3


WOODWARD
LOW VOLTAGE
2301A LOAD SHARING & SPEED CONTROL

CE

W. WOODWARD
10000 W. 10th Ave.
Denver, CO 80202
303 750 4000
FAX 303 750 4001
www.woodward.com

LOW VOLT SPEED
ACTUATOR
SPEED
SPEED
SPEED

CAUTION




VCT VCR ACPR




2301A

7-1-2
↑

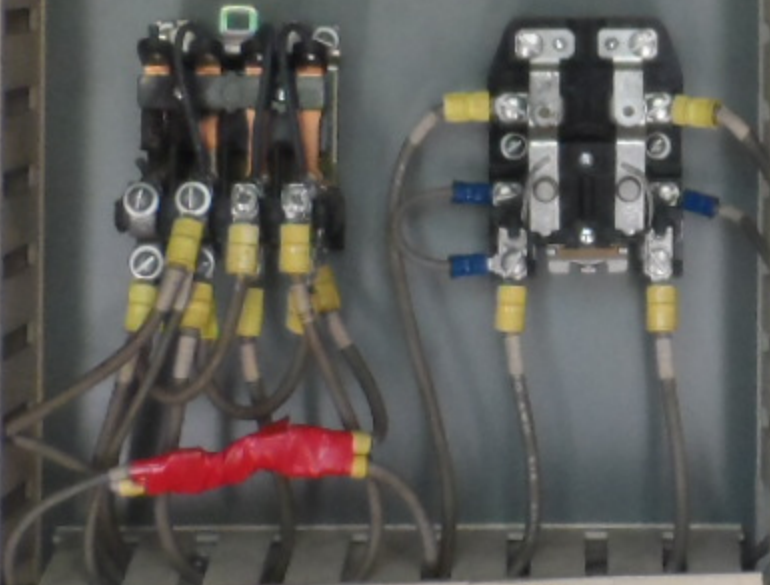

VSCR JWHR

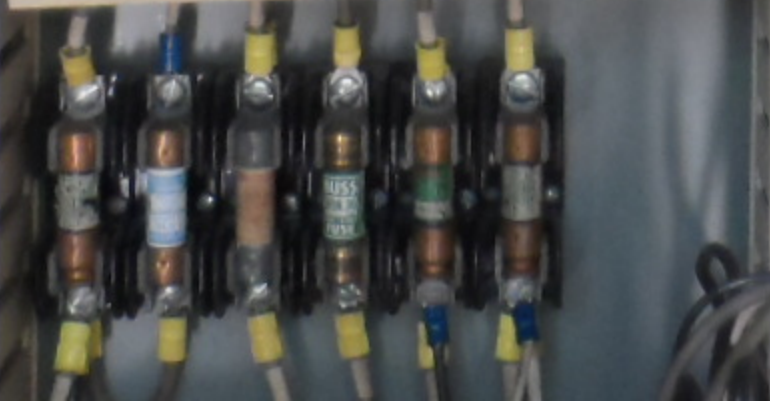

C-CHARGER
CONTINUOUS DUTY

CAUTION: This equipment is for use only by qualified personnel.

INPUT PROTECTION
Push to Reset

EQUALIZE
FLOAT

EQUALIZE
LIGHT



DANGER
DIESEL
FUEL

2	FIRE
1	HEALTH
1	REACTIVITY
	PROTECTION





018931

